


LOREX[®]

Lorex Solar Panel

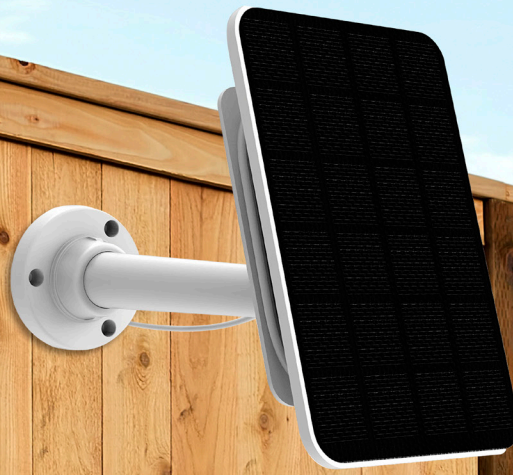

Product Specifications

Electronic

Solar Cell	Monocrystalline Silicon
Solar Conversion Rate	20%
Maximum Power	3.2W
Voltage	6V
Current	530mA
Operating Temperature	-30 °C ~ 70 °C

Structure

Dimension	185mm x 120mm x 6.5mm
Weight	0.286 kg
Material	Plastic, White
Power Interface	Micro USB
Cable Length	13 ft (4 Meters)
Waterproof Level	IP65

Bracket

360° Adjustable wall mount bracket	Winding cable bracket
------------------------------------	-----------------------

Model Information

ACSOL3	Lorex Solar Panel	6-95529-05222-9
--------	-------------------	-----------------


Dimensions

Package	Blue Box with Retail Sleeve
Package Weight	1.8 lb / 0.84 kg
Package Dimensions (W x D x H)	7.9 x 5.1 x 3.5" / 201 x 129 x 88mm
Package Cube	0.08cbf / 0.02cbm

What's Included



1 x Solar Panel



1 x Mounting Bracket



1 x MicroUSB Adapter



1 x Drill Bit



6 x Mounting Anchors & Screws



Quick Start Guide

ACSOL3
lorex.com

Lorex Corporation
10440 Little Patuxent Parkway, Ste. 300,
Columbia, MD 21044, United States

© 2023 Lorex Corporation
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE.
(23-0018-LOR) 06082023-1