

# The Centerpiece of Your Security

Record and view your indoors and outdoors with the Lorex 4K Ultra HD Digital Video Recorder. Keep your recordings private and secure, thanks to the local storage of up to 8TB on the Fusion DVR. Enjoy ample storage for your video footage at no monthly fees. Always know what's happening with Person and Vehicle Detection on compatible cameras. Receive smartphone notifications only when there's a person on your property or when a vehicle pulls into the driveway. Create a tailored home security system with Wired and Fusion Wi-Fi camerassimply pair up to 8/16 Wired Cameras and 4 Lorex Fusion Wi-Fi security devices to the DVR for complete peace of mind.

# **Expand Your Security with Fusion**

- · Create a tailored security system that combines Lorex Wired and Lorex Fusion Wi-Fi devices.
- Expand your system as desired with the Fusion DVR which includes 8/16 Wired and 4 Lorex Fusion Wi-Fi channels.

## Private Storage, No Monthly Fees

- Privacy is a priority-local storage ensures that only you have access to your footage.
- Supports up to an 8TB hard drive with no hidden monthly fees.
- Never miss a thing with 24/7 recording.

# Simple, User-Friendly Navigation

- Enjoy seamless navigation and a faster setup with fewer screens.
- · Instantaneously access your live camera feed with a single click.

# **Features**





Supports Active

**Deterrence Cameras** 

Supports Smart Motion Detection



- · Record and playback 4K video on all channels for impressive video quality.
- · Catch all the details- digitally zoom in up to 8x on distant objects.

## Always Stay Connected

- · View your property and get motion notifications through the Lorex Home app on your smartphone.
- · Easily filter through motion events using the Smart Search feature.\*
- · Instantly activate the deterrence features of the connected cameras with the panic button located on the recorder.\*\*







Smart Home/Voice Control Compatible

# **D863 Series**

lorex.com

# LOREX<sup>®</sup> 4K Ultra HD Digital Video Recorder

# **Product Specifications**

#### General

Video Transmission Technology

Channels

#### Inputs/Outputs

Video Input(s)	<b>D863A8:</b> 8ch: 8 × 1Vp-p, CVBS, 75ohms, BNC Type <b>D863A6:</b> 16ch: 16 × 1Vp-p, CVBS, 75ohms, BNC Type
Video Outputs(s)	1 × VGA, 1 × HDMI
Audio Input(s)	1 ch: RCA
Audio Output(s)	1 ch: RCA
Display	
Display Output Resolution	up to 4K
Live Display	<b>D863A8:</b> 8ch: 1, 4 ,8, 9, 12 <b>D863A6:</b> 16ch: 1, 4 ,8 ,9,16, 20
Live Display Speed (Max)	D863A8: 8ch: 240fps NTSC D863A6: 16ch: 480 NTSC
OSD	On/Off
System Navigation	USB Mouse
Recording	
Recording Frame Rate	4K@7fps; 5Mp@12fps; 4MP/3MP@15fps; 1080p@30fps, 720p@30fps
Recording Schedule	Schedule recordings through Continuous, Motion, Smart Motion (Person and Vehicle), Alarm, Day, Hour per channel
Back-up File Format	DAV/AVI/MP4 file
Video Compression	H.265/H.264
Playback	
Simultaneous Playback	Up to 4 Channels
Playback Speed	Variable Max 16×
Search	By Time/Date, All Motion Events or Smart Motion (Person and Vehicle),

HD Analog

D863A8: 8ch: 8 Wired + 4 Fusion Wi-Fi Channels D863A6: 16ch: 16 Wired + 4 Fusion Wi-Fi Channels

<b>D863A8:</b> 8ch: 8 × 1Vp-p, CVBS, 75ohms, BNC Type <b>D863A6:</b> 16ch: 16 × 1Vp-p, CVBS, 75ohms, BNC Type
1 × VGA, 1 × HDMI
1 ch: RCA
1 ch: RCA
up to 4K
<b>D863A8:</b> 8ch: 1, 4 ,8, 9, 12 <b>D863A6:</b> 16ch: 1, 4 ,8 ,9,16, 20
D863A8: 8ch: 240fps NTSC D863A6: 16ch: 480 NTSC
On/Off
USB Mouse
4K@7fps; 5Mp@12fps; 4MP/3MP@15fps; 1080p@30fps, 720p@30fps
Schedule recordings through Continuous, Motion, Smart Motion (Person and Vehicle), Alarm, Day,

Area (Smart Search)

# Storage

Storage	
Hard Drive Bays	1 Bay
Hard Drive Capacity	1 SATA port, up to 16 TB
Backup Media	USB Flash Drive & USB HDD
Special Features	
Smart Motion Detection	Person and Vehicle Motion Detection
Face Detection	Yes <sup>3</sup> (two channels)
Face Recognition	Yes <sup>3</sup> (two channels)
Virtual Fence (Perimeter protection)	Yes <sup>5</sup> (two channels)
Active Deterrence Support	Yes
Panic Button	Yes
Smart Search	Yes
Smart Home	
Voice Control	Amazon Alexa, Google Assistant
Streaming Options	Chromecast, Apple TV, Amazon Echo
Connectivity	Show, Google Home Hub
Mobile Viewing	Android, iOS
Compatible APP	Lorex Home™
PC/MAC Software	Lorex Cloud
Email Notification	Text and Snapshot
Network Interface	10/100 Base-TX, RJ45
DDNS	Yes (Optional)
USB interface	USB 2.0 × 2
Additional Specifications	
FW Upgrade	USB/Network
Watchdog Function	Yes
Power Consumption	< 10 watts (no HDD included)
Supply Voltage	<b>D863A8:</b> 8ch: 12V/2A <b>D863A6:</b> 16ch: 12V/3A
Unit Dimensions (W × D × H)	12.9 × 9.6 × 2.1" / 328 × 245 × 53mm
Unit Weight	2.75 lbs / 1.26 kg (without HDD)
Operating Temperature	14° ~ 131°F/-10° ~ 55°C
Humidity	10 ~ 90% RH
Download on the	






# Model Information

D863A81B	12-channel (8 Wired + 4 Fusion Wi-Fi) DVR with 1TB HDD	6-95529-04811-6
D863A62B	20-channel (16 Wired + 4 Fusion Wi-Fi) DVR with 2TB HDD	6-95529-04810-9

## Dimensions

Package	Plain Box
Package Weight	5.50lb / 2.4kg
Package Dimensions (W × D × H)	13.07 × 15.43 × 5.31" / 331 × 391 × 135mm
Package Cube	0.62cbf / 0.018cbm

# **Back Panel**

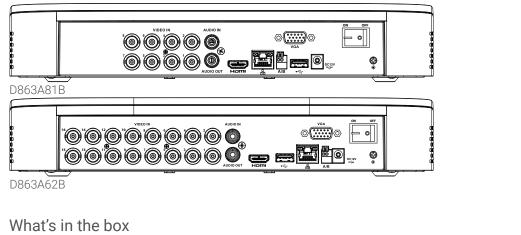





1 × HDMI Cable





Adapter



1 × USB Mouse



Quick Setup Guide

1 × 4K Channel DVR with pre-installed HDD



Disclaimers

- 1. Recording time may vary based on recording resolution and quality, lighting conditions and movement in the scene
- Accuracy of Smart Motion Detection or Person and Vehicle Detection will be influenced by multiple factors, such as the object's distance from the camera, the size of the object, and the height and angle of the camera. Night vision will also impact the accuracy of detection. 3. Accuracy of Face Detection and Face Recognition will be influenced by the distance of the face from the camera. Partially or fully covered faces will not be detected. Night vision will impact the accuracy

- of Face Detection. Facial recording without consent is illegal in certain jurisdictions. Lorex Technology does not assume liability for any use of its product that fails to conform with local laws. 4. Face Detection and Face Recognition are available on up to 2 channels only. Smart Motion Detection can not be enabled on all channels while Face Detection or Face Recognition is enabled. 5. Virtual Fence is available on up to 2 channels only. Smart Motion Detection can not be enabled on the same channel when a single channel is enabled. To enabled Virtual Fence on 2 channels, Smart Motion Detection must be disabled on all channels
- 6. Compatible with select Lorex cameras only. For a list of compatible cameras, please visit www.lorex.com/compatibility
- 7. Controlling certain features in your security system requires a compatible smart device. Availability and performance of certain features and services are smart device dependent and may not be available
- 8. Requires a high-speed internet connection and a router (not included) for remote access. A minimum upload speed of 7.5Mbps is required for the best video performance. Up to 3 devices may connect
- to the system at the same time. For the latest list of supported apps and devices, please visit: www.lorex.com/support 9. Both firmware and software must be updated to latest version to ensure remote connectivity in all areas or networks. For compatibility, features, instructions visit: www.lorex.com/smarthome 10. HDMI output supports up to 4K for high definition multi-channel live or recorded video viewing. Image quality and resolution is dependent on the type of camera connected to the DVR, as well as TV/
- monitor resolution. 11. AppleTV ™ or Chromecast ™ need to be connected to the same network as your recorder. Requires AppleTV Gen 4 or newer with Lorex Home Apple TV APP or Chromecast ™ device connected to the TV that you want to view the system on

\*Detection types need to be supported by the camera. \*\*Deterrence features need to be supported by the system.

All trademarks belong to their respective owners. No claim is made to the exclusive right to use the trademarks listed, other than the trademarks owned by Lorex Corporation. We reserve the right to change models, configurations or specifications without notice or liability. Product may not be exactly as shown.

Apple, the Apple logo and AppleTV are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google, Google Home, Google Play, Google Play logo, Google Assistant logo and Chromecast are trademarks of Google Inc.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates

**D863 Series** lorex.com

Lorex Corporation 10440 Little Patuxent Parkway, Ste, 300, Columbia, MD 21044, United States © 2024 Lorex Corporation

As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE. (22-0090-LOR) 04122024-2